

MEIGAN


Luxury Vinyl

MEIGAN

Luxury Vinyl




STRUCTURE

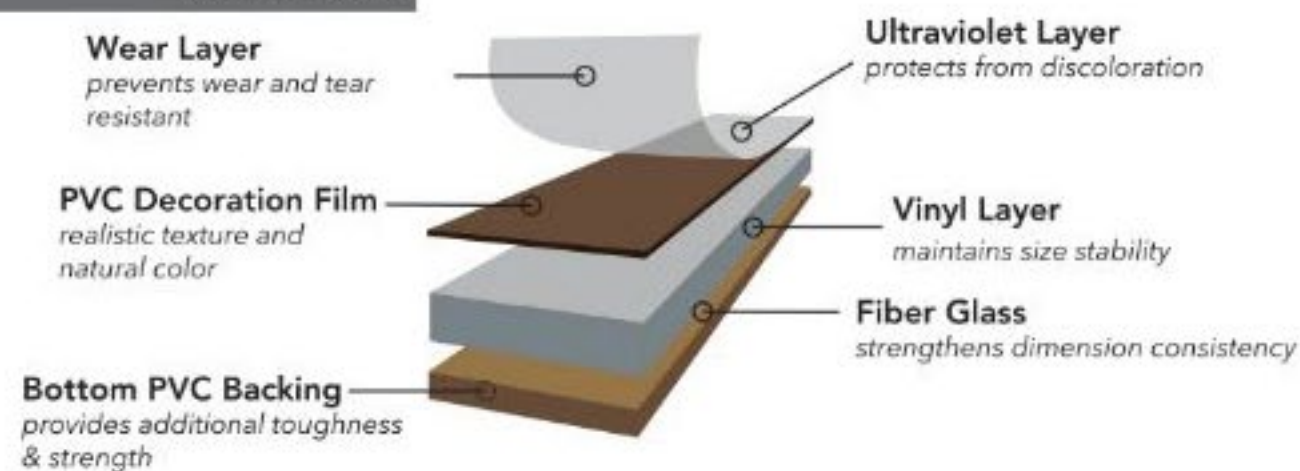

MG - 1807 size/plank : 18,6 cm x 94 cm ; 1 box : 3,32 m² | Thickness : 2.50 mm - Wear Layer : 0.20 mm



MG - 1402 size/plank : 18 cm x 120 cm ; 1 box : 3,24 m² | Thickness : 2.50 mm - Wear Layer : 0.20 mm

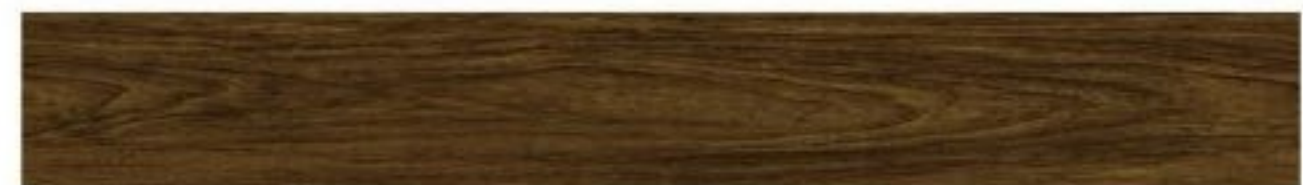


MG - 1204 size/plank : 18 cm x 120 cm ; 1 box : 3,24 m² | Thickness : 3.00 mm - Wear Layer : 0.30 mm



MG - 1801 size/plank : 18 cm x 92 cm ; 1 box : 3,32 m² | Thickness : 3.00 mm - Wear Layer : 0.30 mm



MG - 1501 size/plank : 18 cm x 120 cm ; 1 box : 3,24 m² | Thickness : 3.00 mm - Wear Layer : 0.30 mm

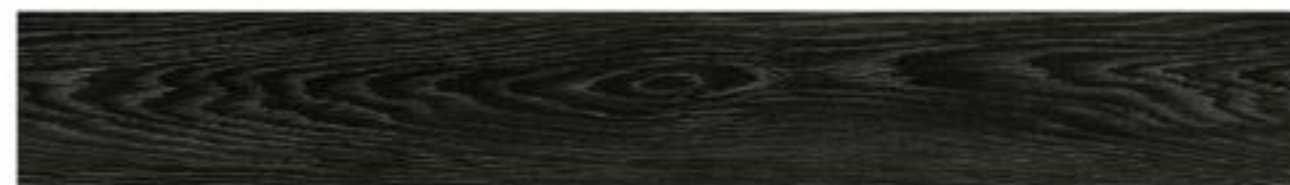

MG - 1526 size/plank : 18 cm x 120 cm ; 1 box : 3,24 m² | Thickness : 2.50 mm - Wear Layer : 0.20 mm



MG - 1401 size/plank : 18 cm x 120 cm ; 1 box : 3,24 m² | Thickness : 2.50 mm - Wear Layer : 0.20 mm



MG - 1237 size/plank : 18 cm x 120 cm ; 1 box : 3,24 m² | Thickness : 3.00 mm - Wear Layer : 0.30 mm



MG - 1384 size/plank : 18 cm x 92 cm ; 1 box : 3,32 m² | Thickness : 3.00 mm - Wear Layer : 0.30 mm



MG - 1874 size/plank : 18 cm x 120 cm ; 1 box : 3,24 m² | Thickness : 3.00 mm - Wear Layer : 0.30 mm

FEATURES



Anti-Slip
Technology



Anti - Bacterial
and Easy Care



Realistic
Textures



Environmental
Friendly



Comfort
on Foot



Termites
Free



Light Fading
Resistance



Spill, Dirt & Scuff
Protection



Excellent Impact
Resistance



Castor Chair
Resistance

TEST REPORT

TEST METHOD	Measurement			
	Unit	Standard	Result	
Appearance	-	NO DEFECTS	NO DEFECTS	
Thickness	mm	3.0 ± 0.15	2.98	
Length	mm	914.4 ± 0.15	914.9	
Width	mm	100 ± 0.15	100.03	
Vertically	mm	< 0.25	0.11	
Residual Indentation	%	< 8.0	3.1	
Heating Loss	wt%	< 0.5	0.1	
LENGTH CHANGE BY HEATING	T.D	%	< 0.25	0.07
	M.D	%	< 0.25	0.08
INDENTATION	20° C	mm	< 0.25	0.39
	45° C	mm	< 1.20	0.60
CHEMICAL RESISTANCE	Soybean Oil	-	NO DEFECTS	NO DEFECTS
	Lubricant	-		
	95% Ethylalcohol	-		
	10% Ammonium Hydroxyde	-		
	Milk	-		
	5% Acetic Acid	-		
	5% Hydrochloric Acid	-		
	Kerosene	-		
	Soysauce	-		
Cement Paste	-			
LENGTH CHANGE BY WATER ABSORPTION	T.D	%	-	0.03
	M.D	%	-	0.04
SCRATCHING TEST	95% Ethanol	mm	< 3.1	1.7
	2% Sodium Hydroxide	mm	< 3.1	1.8
	Soybean Oil	mm	< 3.1	1.7
	Kerosene	mm	< 3.1	2.5

WWW.MEIGANFLOORING.COM